
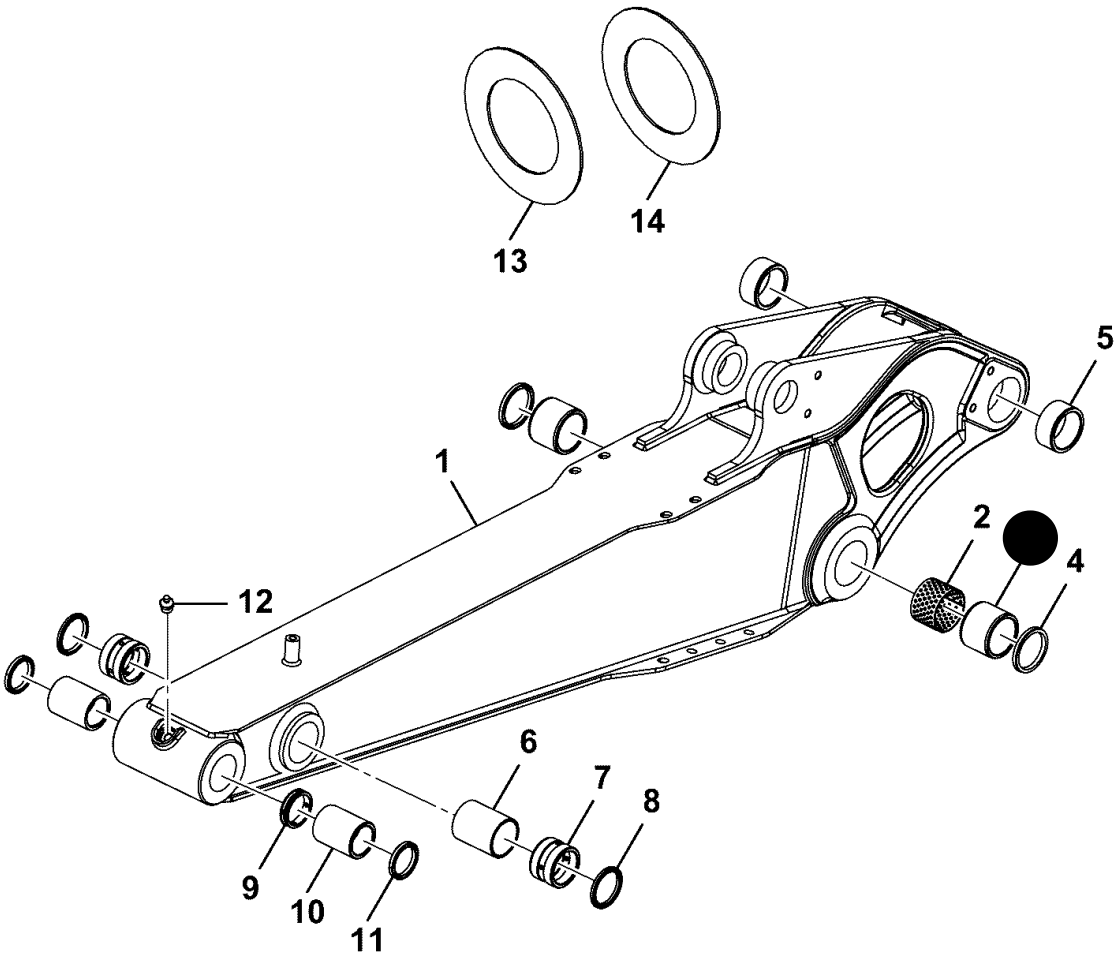


2025/11/10 14:46:13

 B400-25-1 EXCAVATOR INSTALLATION ASSEMBLIES DIPPER HEAVY DUTY, 1100mm



A	402/S0826	GA Dipper 1100 HD DE	1
1	403/D1117	MC Dipper 1100 HD	1
2	403/E6241	Spacer 52.4 OD, 50 ID 36mm	1
3	334/E1902	Bearing Bush 55x45x42 < Supersession	2
4	813/00425	Seal 45x55x5 < Supersession	2
5	402/E7713	Bush 55 O.D 45 I.D 25.5mm	2
6	403/G6485	Spacer Perforated 47.4OD, 45ID, 60mm	1
7	403/G7065	Bush 50 OD x 40 ID x 33.5mm < Supersession	2
8	904/15400	Seal < Supersession	2
9	403/A8359	Spacer Perforated 42.4OD, 40ID, 10mm	1
10	402/H4868	Bush 45 OD x 35 ID x 125mm	2
11	813/00467	Seal Pivot Pin 35 x 45 x 5	2
12	1450/0001	Nipple Grease Straight 1/8" < Supersession	1
13	334/V7913	Shim 0.8mm Supersession >	1
14	334/V7902	Shim 1.2mm Supersession >	1